


# SCORPION™ QUICK REFERENCE GUIDE



# SCORPION™ QUICK REFERENCE GUIDE

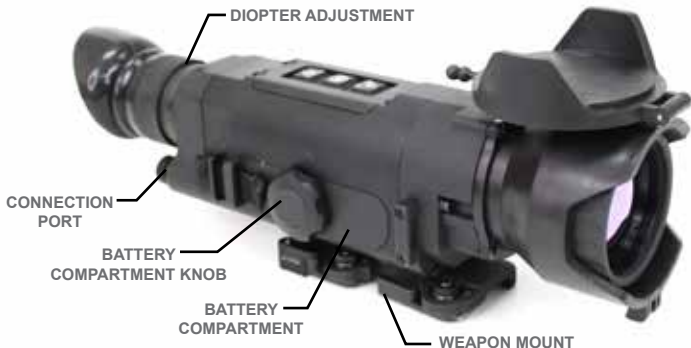

## POWERING THE SCORPION

1. To set the unit to the ON position, turn the power knob clockwise until a click is sounded.
2. To set the unit to the OFF position, turn the knob counter-clockwise until a click is sounded.



## SWITCHING POLARITY (WHITE HOT / BLACK HOT):

1. Set the camera to the ON position.
2. Turn the power knob clockwise (and release) to toggle between White Hot and Black Hot.



## ADJUSTING THE DIOPTER

1. Rotate the textured eyepiece ring clockwise or counter-clockwise for the sharpest image in the display.



## ADJUSTING THE LENS FOCUS

1. To focus the lens, rotate the lens element within the cutouts of the integrated lens cover.
2. Rotate the lens clockwise for far focus, counter-clockwise for near focus.



## CONNECTION PORT

1. Remove the dust cover cap and connect the interface cable.
2. Use the interface for outputting image data and inputting external power.

## PRIMARY BUTTON FUNCTIONS

1. ZOOM: Cycles through 2X, 4X and back to original magnification.
2. STILL CAPTURE: Press once to digitally capture a still image.
3. BRIGHTNESS: Cycles through 8 levels of display brightness.

## USING THE MENU SYSTEM

The SCORPION uses a menu system to manage the on board image storage, reticle selection and boresighting features. To access the menu system, do the following:

1. Press and hold the Still Capture button until the drop-down Main Menu appears in the display (approximately 3 seconds).

## SECONDARY BUTTON FUNCTIONS:

Once the menu system is displayed, use the buttons on the top of the camera to navigate as follows:

1. UP (Zoom)
2. SELECT (Still Capture)
3. DOWN (Brightness)

