

UTAC-Series

July 29, 2016

Universal Thermal Acquisition Clip-On

UTAC-32iL shown below.



The UTAC Series from Nivisys is the latest development of our unity magnification clip-on thermal imager. This compact sight is weapon mounted forward of your day sight without any requirement to re-sight your weapon and allows for fast reaction in rapidly changing combat environments.

The UTAC provides the operator enhanced surveillance and targeting capability during night and adverse weather conditions. The UTAC is compatible with ACOG/RCO and many other traditional day sights. The superior optical design contributes to excellent image quality and the ability to maintain point of aim/point of impact at significant ranges. The UTAC Series features Nivisys' Patented "Accu-Zoom" technology, enabling the use of digital zoom in clip on weapon mounted sights with no loss of accuracy.

The UTAC Series is offered in a variety of resolutions and objective lenses, providing a variety of fields of view and target detection ranges. The UTAC Series models include image capture to an internal memory and review of still images on the internal micro-display. Video and still images may be downloaded and captured to a SD card using the optional Audio Visual Kit.

Export of the commodities described herein is strictly prohibited without a valid export license issued by the U.S. Department of State, Directorate of Defense Trade Controls as proscribed in the International Traffic in Arms Regulations (ITAR), Title 22 Code of Federal Regulation, Parts 120-130.

DISTRIBUTION: OSR 14-S-1226. Approved for public release; distribution unlimited. © 2016 Nivisys

FEATURES*

- **Compact, Rugged Design**
- **Wired Remote Operation**
- **Low Power Consumption**
- **Clip-on Weapon or Hand-held for surveillance**
- **Simple 3 Button Operation**
- **Single Throw Lever Mount**
- **Video Out (RS-170)**
- **Selection of 5 Reticles**
- **Image Capture and Review**

- **Direct Button Functions**
 - Digital Zoom**
 - Polarity**
 - Display Brightness**

- **Menu Functions**
 - Reticle Select**
 - Windage Adjust**
 - Elevation Adjust**
 - Display Color Options**
 - Video Out Enable**
 - Image Capture**

**For more information
on the UTAC Series or
other Nivisys products
call (480) 970-3222 or
visit us on the web at
www.nivisys.com.**

Made in USA

UTAC Series BASIC SYSTEM:

- UTAC Basic Unit
- Soft Carry Case
- Case Shoulder Strap
- CR123 Batteries (4ea.)
- Lens cover
- Coupling Hood
- Weapon Mount
- Remote Switch
- Lens Cleaning Kit
- Operator Manual
- Quick Reference Guide
- Mount Adjustment Tool



Sensor (see table)
Vanadium Oxide (VOx)
Microbolometer
60hz frame rate

Thermal Sensitivity
<50mK

Spectral Response
7 – 14 μ m


Battery Type/ Life
CR123 Lithium (2ea.)
4 hours continuous

Boresight Accuracy
<0.5 MOA

Environmental
Immersion proof

Calibration
On- Demand

COLOR MODES:

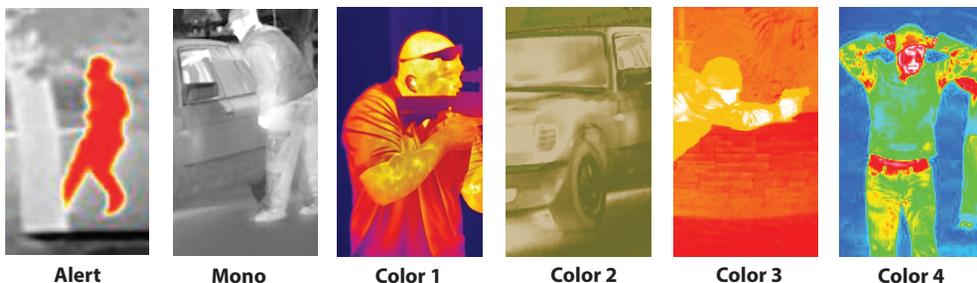

Alert

Mono

Color 1

Color 2

Color 3

Color 4

MODEL DEPENDENT SPECIFICATIONS*

*All specifications are subject to change without notice.

Model	Sensor Resolution, Pixel Size	Objective Lens	Mag	FOV (H x V)	Weight (w/ bat)	Dimensions (L x H x W)	Detection: Man/ Vehicle	Display	Operating Temp
UTAC-16cS	160 x 128, 25 μ	19mm f/1.25	1.0	12° x 9°	487g	14.5 x 6.6 x 6.8cm	311m/595m	LCD	-10° to +45° C
UTAC-16iS								OLED	-40° to +55° C
UTAC-32cM	Standard 324 x 256, 25 μ	35mm f/1.4	1.0	13° x 10° (9° x 7°)	568g	16.9 x 6.6 x 6.8cm	719m/1368m (883m/1679m)	LCD	-10° to +45° C
UTAC-32iM								OLED	-40° to +55° C
UTAC-32cL	(Optional 336 x 256, 17 μ)	50mm f/1.2	1.0	9° x 7° (6° x 5°)	898g	22.2 x 7 x 7.6cm	948m/1625m (1212m /2297m)	LCD	-10° to +45° C
UTAC-32iL								OLED	-40° to +55° C
UTAC-64cS	640 x 512, 17 μ	25mm f/1.1	1.0	25° x 18°	495g	15.2 x 7.5 x 7.2cm	709m/1212m	LCD	-10° to +45° C
UTAC-64iS								OLED	-40° to +55° C
UTAC-64cM		35mm f/1.4	1.0	18° x 13°	568g	16.9 x 6.6 x 6.8cm	883m/1679m	LCD	-10° to +45° C
UTAC-64iM								OLED	-40° to +55° C
UTAC-64cL		50mm f/1.2	1.0	12° x 9°	898g	22.2 x 7 x 7.6cm	1212m/2297m	LCD	-10° to +45° C
UTAC-64iL								OLED	-40° to +55° C